

# edesa

DECORATIVE CHIMNEY-STYLE




## ECP-64110 X

Cod. **932271963**

EAN **8422248371377**



**A**

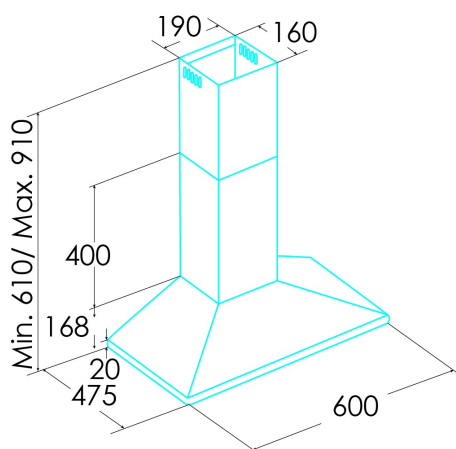

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371377 |
| Subfamily | Chimney       |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |      |
|-----------------------------------------------|------|
| AEC (Annual energy consumption) (kWh/year)    | 262  |
| EEL class (energy efficiency class)           | A    |
| FDE (fluid dynamic efficiency)                | 284  |
| FDE class (fluid dynamic efficiency class)    | A    |
| LE (light efficiency) (lux/W)                 | 67   |
| LE class (light efficiency class)             | A    |
| GFE (grease filtering efficiency)             | 701  |
| GFE class (grease filtering efficiency class) | S    |
| Airflow in normal mode MIN (m3/h)             | 1743 |
| Airflow in normal mode MAX (m3/h)             | 4773 |
| Acoustic power in normal mode MIN (dB)        | 56   |
| Acoustic power in normal mode MAX (dB)        | 69   |
| Po (energy consumption in off mode) (W)       | 0    |

### Integration directive EU 66/2014

|                                                            |      |
|------------------------------------------------------------|------|
| f (time increase factor)                                   | 1    |
| EEL (Energy Efficiency Index)                              | 492  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 2588 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 260  |
| WBEP (power consumption at maximum efficiency) (W)         | 659  |
| WL (nominal power lighting system) (W)                     | 3    |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 200  |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 600 |
| Depth (mm)                | 475 |
| Maximum total height (mm) | 910 |
| Minimum total height (mm) | 670 |
| Diamètre de sortie (mm)   | 150 |

### Characteristics

|                                       |                        |
|---------------------------------------|------------------------|
| Motor quantity                        | 1                      |
| Motor model                           | K10 450 B              |
| Maximum pressure (Pa)                 | 260                    |
| Filter technology                     | Aluminium mesh         |
| Control technology                    | Mechanical push button |
| Booster                               | -                      |
| Power levels                          | 3                      |
| Timer                                 | -                      |
| Filter saturation indicator           | -                      |
| Charcoal filter replacement indicator | -                      |
| Dimmer function                       | -                      |
| Connectivity                          | No                     |
| Remote control                        | -                      |
| Display                               | -                      |

### Lighting

|                |       |
|----------------|-------|
| Light model    | CSLED |
| Ray technology | LED   |

### Installation

|                                         |     |
|-----------------------------------------|-----|
| Minimum distance to electric plate (mm) | 650 |
| Minimum distance to gas plate (mm)      | 650 |
| Recirculation option                    | √   |
| Charcoal filter                         | -   |
| Back draught shutter                    | No  |
| Inner shield                            | -   |

### Electric connection

|                         |         |
|-------------------------|---------|
| Nominal voltage (V)     | 220-240 |
| Nominal frequency (Hz)  | 50      |
| Nominal input power (W) | 113     |

|                           |         |
|---------------------------|---------|
| Electric shock protection | Class I |
| Power cord length (m)     | 11      |
| Plug type                 | No plug |

#### Accessories

|                                 |           |
|---------------------------------|-----------|
| Upper decorative duct extension | 15103039  |
| Activated charcoal filter       | '02859489 |
| Noiseless flexible duct         | '02893002 |