

# edesa


DECORATIVE T-SHAPED



## ECB-77220 GBK

Cod. 932271959

EAN 8422248363419

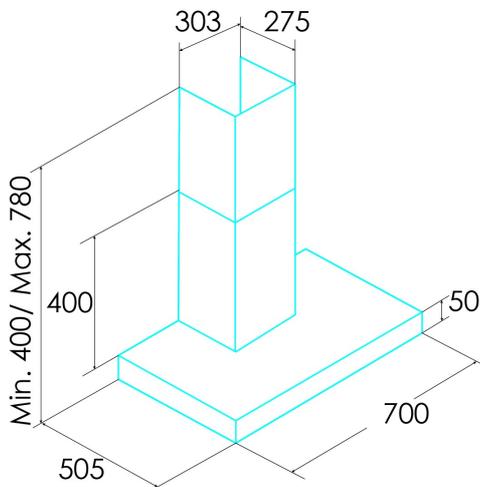

### GENERAL INFORMATION

EAN/UPC	8422248363419
Subfamily	Box

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	11,7
EI class (energy efficiency class)	A++
FDE (fluid dynamic efficiency)	29,3
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	39
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	71,1
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m3/h)	237
Airflow in normal mode MAX (m3/h)	627
Acoustic power in normal mode MIN (dB)	43
Acoustic power in normal mode MAX (dB)	65
Po (energy consumption in off mode) (W)	0,38

### Integration directive EU 66/2014

EI (Energy Efficiency Index)	36,2
QBEP (maximum efficiency at air flow point) (m3/h)	237,6
PBEP (maximum efficiency at pressure point) (Pa)	120,3
WBEP (power consumption at maximum efficiency) (W)	27,1
WL (nominal power lighting system) (W)	3,8
EMIDDLE (Average illuminance on the cooking surface) (lux)	149

### External Dimensions

Width (mm)	700
Depth (mm)	505
Maximum total height (mm)	830
Minimum total height (mm)	450
Diamètre de sortie (mm)	150

### Characteristics

Control technology	Electronic Touch Control
Booster	-
Power levels	3
Timer	√
Connectivity	No
Remote control	-
Display	Display

### Lighting

Light model	ECOLED
Ray technology	LED

### Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650
Charcoal filter	√

### Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	76
Electric shock protection	Class I
Plug type	Type F

### Accessories

Upper decorative duct extension	02862304
---------------------------------	----------

